


FL04 Solar 504 LED Four Floodlight System

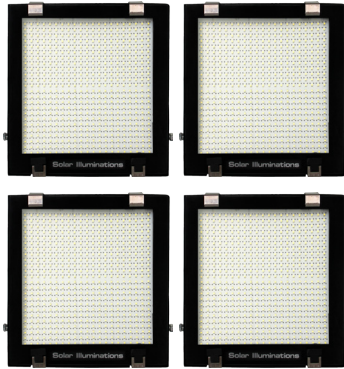

TECHNICAL SPECIFICATIONS

Manufactured in an ISO9001:2000 'Quality Assured' facility.

PERFORMANCE

- Up to 12+ hours of illumination each night.
- Up to 24 hours of autonomy subject to time length of night time illumination.
- Each light can illuminate an area approx. 12 metres x 12 metres (40' x 40') and beyond depending on the mounting height.

LIGHT FITTING

- System includes four heavy duty floodlights.
- 504 hyper-bright Cree® SMD/LED's.
- Each SMD/LED provides 8 Lumens at source. Total 4032 Lumens per lamp.
- The weather resistant sign light has approx. 14.5 metres (48') of pre-wired cable which is pre-plugged ready for easy connection to the battery box.
- The sign light fitting is weather rated to I.P 65.
- Fitted with a U shape mounting bracket.
- Colour of fitting is black.
- Product dimensions (main floodlight body) approx. 28cm x 30cm x 10cm (11" x 12" x 4") LxWxD.

BATTERY

- 24 volt dc system.
- Two, high capacity 12 volt 200 Amp/Hr sealed lead acid batteries are required (not included).
- Batteries must be connected together in series.

BATTERY BOX

- A remote battery box is supplied to accommodate the batteries
- The battery box has a hinged door which is lockable (padlock not included).
- The battery box has an integral battery shelf and also houses the programmable control module.

CONTROL MODULE

- This system includes a programmable control module which regulates and manages the solar panel power, battery power, and illumination time.
- The compact control module has LED indicators to display status, and houses connections for solar panel, batteries, and lamps.
- User programmable illumination time of up to 1 to 12 hours or dusk-to-dawn setting (where conditions permit).
- User or installer can set the control module to run from dusk and then shut off after a certain amount of hours.
- Default setting is typically dusk to dawn.
- Instructions are supplied should the user or installer need to program or re-program the module*.

SOLAR PANEL

- Supplied with four 140 watt aluminium framed solar panels.
- Supplied with approximately 5m (17') of cable to connect directly to the battery box.
- Two special mounting frames are included to allow the solar panel to attach to a vertical or

One Year*
Warranty ✓

Low Price
Guarantee ✓

No Quibble*
Returns ✓

UK & Ireland
Shipping ✓


Lifetime
Tech Support ✓

Communications House, 26 York Street, • London, W1U 6PZ • Great Britain • Phone: 020 7873 2262 • Fax: 020 7806 8372

MONDAY - FRIDAY 9:00AM - 9:00PM (UK TIME)

www.solarilluminations.co.uk • sales@solarilluminations.co.uk

*SUBJECT TO OUR TERMS & CONDITIONS, AND RETURNS POLICY

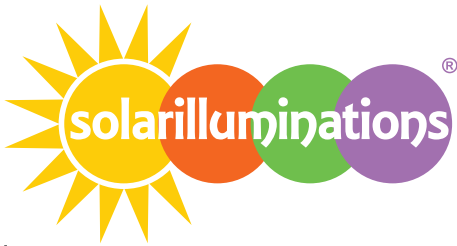


FL04 Solar 504 LED Four Floodlight System

horizontal surface with two hole pre-drilled into each section of the frame.


- Each 140w solar panel dimensions are approx. 114cm x 102cm x 5cm (45" x 40" x 2") LxWxD.
- The solar panel support/mounting frames requires a footprint of approx. 97cm x 112cm (38" x 44") LxW.
- The solar panel support brackets are triangular in shape and have a face length of approx. 109cm (43"), a stand-off of approx. 55cm (21.5") and a fixing length of approx 95cm (37.5").

INSTALLATION

- Easy to install. All connections are simply plug & play.
- A pair of triangle shaped support frames are supplied for the solar panel.
- For attaching the light fitting directly to a round post or round pole we recommend using our clamp attachment kit (product code FL12).
- An optional support arm can be purchased (FL11)



Optional Accessory: FL11

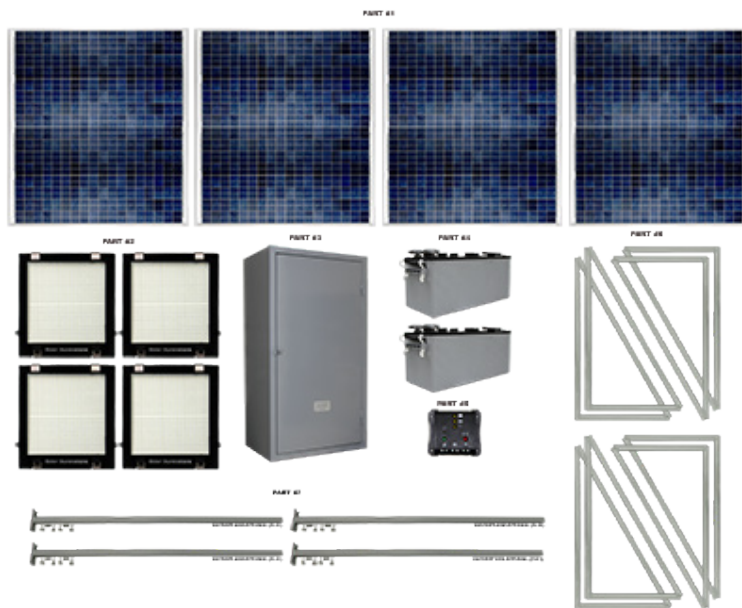

*SUBJECT TO OUR TERMS & CONDITIONS, AND RETURNS POLICY

One Year*
Warranty ✓

Low Price
Guarantee ✓

No Quibble*
Returns ✓

UK & Ireland
Shipping ✓

Lifetime
Tech Support ✓

Communications House, 26 York Street, • London, W1U 6PZ • Great Britain • Phone: 020 7873 2262 • Fax: 020 7806 8372

MONDAY - FRIDAY 9:00AM - 9:00PM (UK TIME)

www.solarilluminations.co.uk • sales@solarilluminations.co.uk