



## BC13 SOLAR LED BOLLARD LIGHT



Utilizes high-output LED technology.



IES lighting distribution data available.

This popular, solar powered, LED bollard light can be quickly and easily installed almost anywhere. Perfect for entrances, car parks, housing estates, footpaths, and driveways etc. Ideal for residential or commercial applications. It's made from extruded aluminium, powder coated and fitted with a clear polycarbonate lampshade. 200lm light output is provided by twelve, high intensity, white coloured LEDs within the circular lens section. In a dark location, this light fitting is capable of projecting light outwards and downwards for up to several meters (360 degrees). Choice of two sizes: small (84cm tall); or large (104cm tall).



**Free Delivery\*** ✓  
UK and Europe

**Lowest Price\*** ✓  
Guarantee

**Lifetime\*** ✓  
Tech Support

**24 Month\*** ✓  
Product Warranty


**No Hassle\*** ✓  
Returns

4 Old Park Lane • London • W1K 1QW • Great Britain

Phone: 020 7873 2262 • Fax: 020 7806 8372

[www.solarilluminations.co.uk](http://www.solarilluminations.co.uk) • [sales@solarilluminations.co.uk](mailto:sales@solarilluminations.co.uk)

\*SUBJECT TO OUR TERMS & CONDITIONS, AND RETURNS POLICY

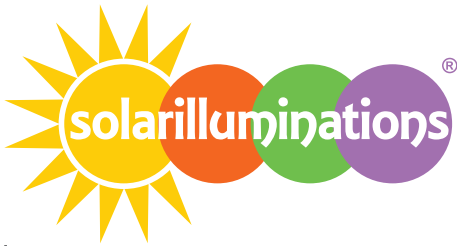

## BC13 SOLAR LED BOLLARD LIGHT

### PERFORMANCE

- Typically illuminates dusk to dawn or up to 12 hrs (subject to location).
- Automatically turns on at dusk and off at dawn.
- All aluminium construction with a satin black powder coated finish.
- Easy to install. Includes a set of expanding anchor bolts and template.
- Illumination pattern is 360 degrees with projection of light down towards the ground and outwards for up to several meters.
- Light output is dark sky compliant, a full cut-off light fitting.
- The small bollard is approximately 84 cm high.
- The large bollard is approximately 104 cm high.
- Main body is approximately 15 cm diameter.
- The clear, polycarbonate lampshade section is approximately 18 cm diameter and 20 cm high.

- The top section of the bollard is approximately 23 cm diameter.
- The flange mount base is approximately 21.5 cm diameter and includes four pre-drilled holes for securing to a solid, level surface.

### LUMINAIRE

- Twelve super bright, high output white coloured LED bulbs.
- 1.5W LED power.
- LED colour temperature is 5,500k (daylight white).
- Light output is 200 lumens.
- Light output is equal to about 20W of incandescent lighting.

### BATTERY

- 3.7V 2400mAh lithium battery supplied and pre-installed.
- Battery replaceable when needed.

### SOLAR PANEL

- High quality, integrated 2.5W solar panel.
- The solar panel is neatly built into the top of the bollard.



**Free Delivery\*** ✓  
UK and Europe

**Lowest Price\*** ✓  
Guarantee

**Lifetime\*** ✓  
Tech Support

**24 Month\*** ✓  
Product Warranty

**No Hassle\*** ✓  
Returns

4 Old Park Lane • London • W1K 1QW • Great Britain

Phone: 020 7873 2262 • Fax: 020 7806 8372

[www.solarilluminations.co.uk](http://www.solarilluminations.co.uk) • [sales@solarilluminations.co.uk](mailto:sales@solarilluminations.co.uk)

\*SUBJECT TO OUR TERMS & CONDITIONS, AND RETURNS POLICY