




FL60

Solar Mini LED Floodlight System

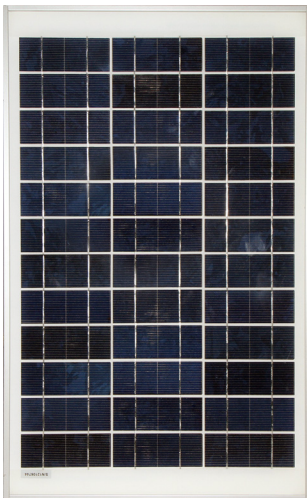

TECHNICAL SPECIFICATIONS

Manufactured in an ISO9001:2000 'Quality Assured' facility.

PERFORMANCE

- Typically offers about 6 hours of lighting.
- Can illuminate an area up to 14 m x 14 m (45' x 45') depending on height installed.
- If you require dusk to dawn lighting we have similar systems available that can provide this.

LIGHT FITTING

- One light fitting is included in this system.
- The light is fitted with powerful 10w SMD/LED.
- Total 800-950 Lumens per lamp (subject to colour temperature).
- LED beam angle is approx. 120 degrees.
- Choice of white, or RGB (multi-colour LED)
- White LED colour temperature is approx. 6000-6500k.
- RGB LED provides 16 different colours, dimmable feature and colour changing option.
- RGB model comes complete with a IR remote control.
- This system can typically operate from dusk for about 6 hours each night.
- The light is fitted with approximately 5,5 metres (18') of pre-wired cable which is pre-plugged ready for easy connection to the battery box. Additional extension cable is available as an option.
- The light fitting is weather rated to I.P 65. and is fitted with a U shape mounting bracket.
- The light's mounting bracket has pre-drilled holes to allow fixing using screws or bolts (not included).
- Grey coloured finish of light fitting.
- Light fitting dimensions approx. 11cm x 9cm x 8cm (4.5" x 3.5" x 3") LxWxD.

BATTERY

- One high capacity 12 Volt 12 Amp/Hr sealed lead acid battery is supplied.
- Battery type is AGM. Gel battery is available by special order.

BATTERY BOX

- A plastic weatherproof battery box is supplied to accommodate the battery.
- The battery box has a removable front which is lockable (padlock not included).
- The battery box also houses the controller.
- The battery box is approx. 27cm x 20cm x 12cm (10.5" x 8" x 4.5") LxWxD.

CONTROL MODULE

- This system includes a programmable control module which regulates and manages the solar panel power, battery power, and illumination time.
- The compact control module has LED indicators to display status, and houses connections for solar panel, batteries, and lamp.
- User programmable illumination time of up to 1 to 12 hours or dusk-to-dawn setting (where conditions permit).
- User or installer can set the control module to run from dusk and then shut off after a certain amount of hours.
- Default setting is typically dusk to dawn.
- Instructions are supplied should the user need to program or re-program the module*.

One Year*
Warranty ✓

Low Price
Guarantee ✓

No Quibble*
Returns ✓

UK & Ireland
Shipping ✓


Lifetime
Tech Support ✓

Communications House, 26 York Street, • London, W1U 6PZ • Great Britain • Phone: 020 7873 2262 • Fax: 020 7806 8372

MONDAY - FRIDAY 9:00AM - 9:00PM (UK TIME)

www.solarilluminations.co.uk • sales@solarilluminations.co.uk

*SUBJECT TO OUR TERMS & CONDITIONS, AND RETURNS POLICY

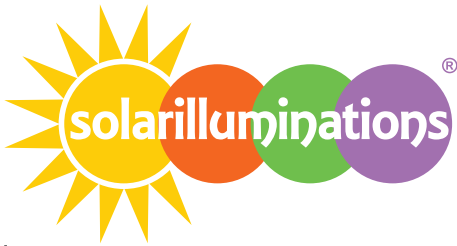

FL60

Solar Mini LED Floodlight System

SOLAR PANEL

- Aluminium framed 20 watt solar panel is included and is fitted with approximately 3 metres (10') of cable/cord. Additional cord is available as an optional extra.
- The solar panel cable connects directly to the battery box.
- The solar panel support is supplied with a fold-out 'U' shape bracket which can be used to mount it to a suitable surface.
- The 20w solar panel dimensions approx. 57cm x 36cm x 3cm (22.5" x 14" x 1") LxWxD.

INSTALLATION

- Easy to install.
- All connections are simply plug & play.
- Solar panel is supplied with built on u-shaped bracket.
- Light fitting is supplied with bracket.



One Year*
Warranty ✓

Low Price
Guarantee ✓

No Quibble*
Returns ✓

UK & Ireland
Shipping ✓

Lifetime
Tech Support ✓

Communications House, 26 York Street, • London, W1U 6PZ • Great Britain • Phone: 020 7873 2262 • Fax: 020 7806 8372

MONDAY - FRIDAY 9:00AM - 9:00PM (UK TIME)

www.solarilluminations.co.uk • sales@solarilluminations.co.uk

*SUBJECT TO OUR TERMS & CONDITIONS, AND RETURNS POLICY